

### Processing of all three gluing techniques with interchangeable gluing units

The **Quickbinder** offers you a unique variety, both in its range of applications through selective processing of Hotmelt, coldglue and PUR gluing techniques, and through optional processing of gauzing materials for producing book blocks and special brochures (i.e. swiss-brochures, Otabind-brochures) in one work process.

**Hotmelt gluing** unit with separate processing of spine and side glue, an integrated 25 kg premelter for the spine gluing unit and automatic length control for spine and side gluing. The side gluing unit can be adjusted by motors to the required product thickness.


**PUR gluing** unit with a patented, integrated 20 kg barrel melting system. The specially coated glue pot, as an interchangeable system, ensures optimal utilization, with flexibility being guaranteed by the automatic length control system for spine and side gluing.

**Cold gluing** unit with separate processing of spine and side glue, a pneumatic pump for the glue circuit comprising 30 kg pails and an automatic length control system for spine and side gluing. The contra-rotating spinner ensures precise and even application of the glue.

### Excellent binding quality thanks to perfect spine preparation

The powerful 5.5 kW spine processing system, with main milling unit, multiple knife head and dust extraction system, ensures perfect preparation of book spines. The multiple knife head, as the centrepiece of spine preparation, exposes the paper fibres by precise cutting with its sharp-edged duplex blades to increase the adhesive surface. The protective cover of the milling unit is adjusted automatically.

Spine preparation  
in detail

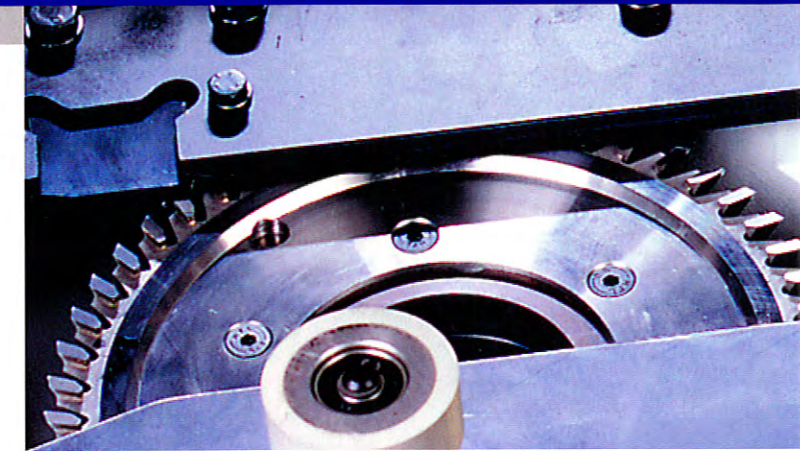


### Universal and easy to use: The rotary cover feeder

The easy-to-use rotary cover feeder assists in processing 4, 6 and 8 page covers. The slight inclination of the cover magazine minimizes friction, in particular for sensitive covers.

The **scoring station** guarantees optimal scoring for different cover materials. The space between the main scores and the cover width can be adjusted automatically.



Hotmelt gluing

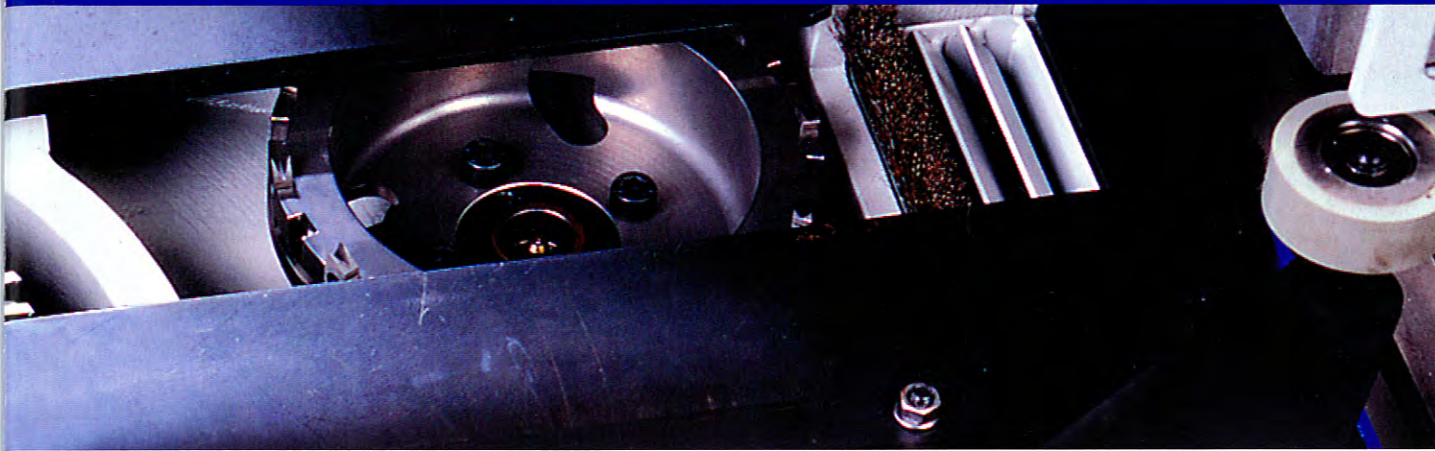

### Gauzing station


The gauzing station can be integrated into the system without any extension of the machine. Cycle-controlled suction and blowing air in the aligning table permits exact positioning of the gauzing strip. The gauzing strip can be cut to length using the circular cutters.



Gauzing station

### Delivery unit

The delivery unit with automatic setting of the product thickness provides smooth "non-drop" transfer of the products from the clamps. The delivery gripper (option) guarantees secure transfer of products.

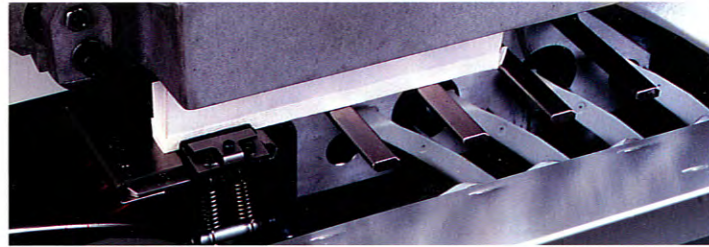


Cold gluing



The **cleaning unit** for the PUR gluing unit allows safe and effective cleaning to be performed in accordance with pertinent trade regulations.

# Wohlenberg's Universal Perfect Binder Quickbinder

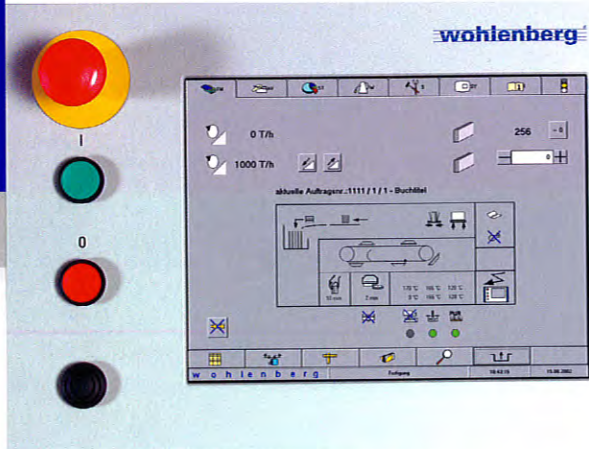

Ease of use thanks to self-explanatory, interactive user prompting and touch screen

## Quality doesn't just happen - it's the result of intensive detailed work

A large format range, extraordinary flexibility and space-saving compactness make the **Quickbinder**, the compact, universal top-quality perfect binder from Wohlenberg, stand out.


Thanks to its self-supporting design, the stand-alone binder is a transportable function unit.

PUR gluing unit with specially coated glue pot

## Navigator – the graphically interactive user interface

Wohlenberg has developed a completely new user interface, the **Navigator**, for easy use with even the most complex binding systems, such as a production line with **Champion e**, **Master e** or **Quickbinder** perfect binders and a **trim-tec three-knife trimmer**. The outstanding feature of this development is its use of a clearly laid out, graphically interactive operating structure.

The **Navigator** also forms the interface between the perfect binding system and the **bind-com**® technical control station, thus forming the basis for further automation of the perfect binding system and creating the prerequisite for integration of the binding line into a JDF workflow - CIP4 (currently under development).

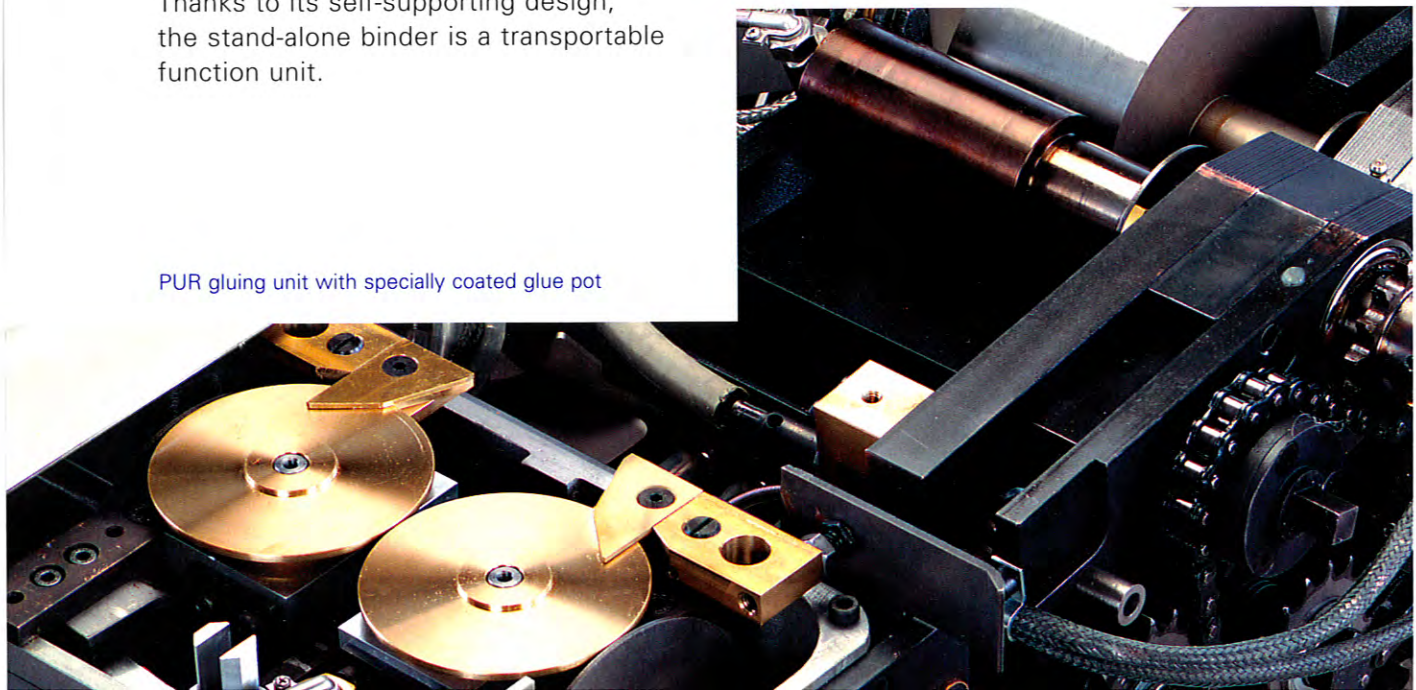

## Wohlenberg Buchbindesysteme GmbH

Weserstraße 26  
27283 Verden

Phone: +49 (0)42 31/775-0  
Fax: +49 (0)42 31/775-29

<http://www.wohlenberg.com>  
e-mail: [sales@wohlenberg.com](mailto:sales@wohlenberg.com)

### Technical Data – Quickbinder

Mechanical rating	500 - 2000	cycles/h
Opening width of clamps	max. 90	mm
Book hang-out	8, 10, 12	mm
Product height	110 - 430	mm
Product width	105 - 320	mm
Product thickness	2 - 70	mm
Cover height	110 - 435	mm
Cover width	208 - 650	mm
Width of rear side of cover	103 - 310	mm

### Overall dimensions

Length	4.1	m
Width	1.8	m
Height	1.4	m

