


AUTOMATIC FLATBED DIECUTTER

REVOTECH 106SR

Revolutionary
Diecutting Technology
For the Future

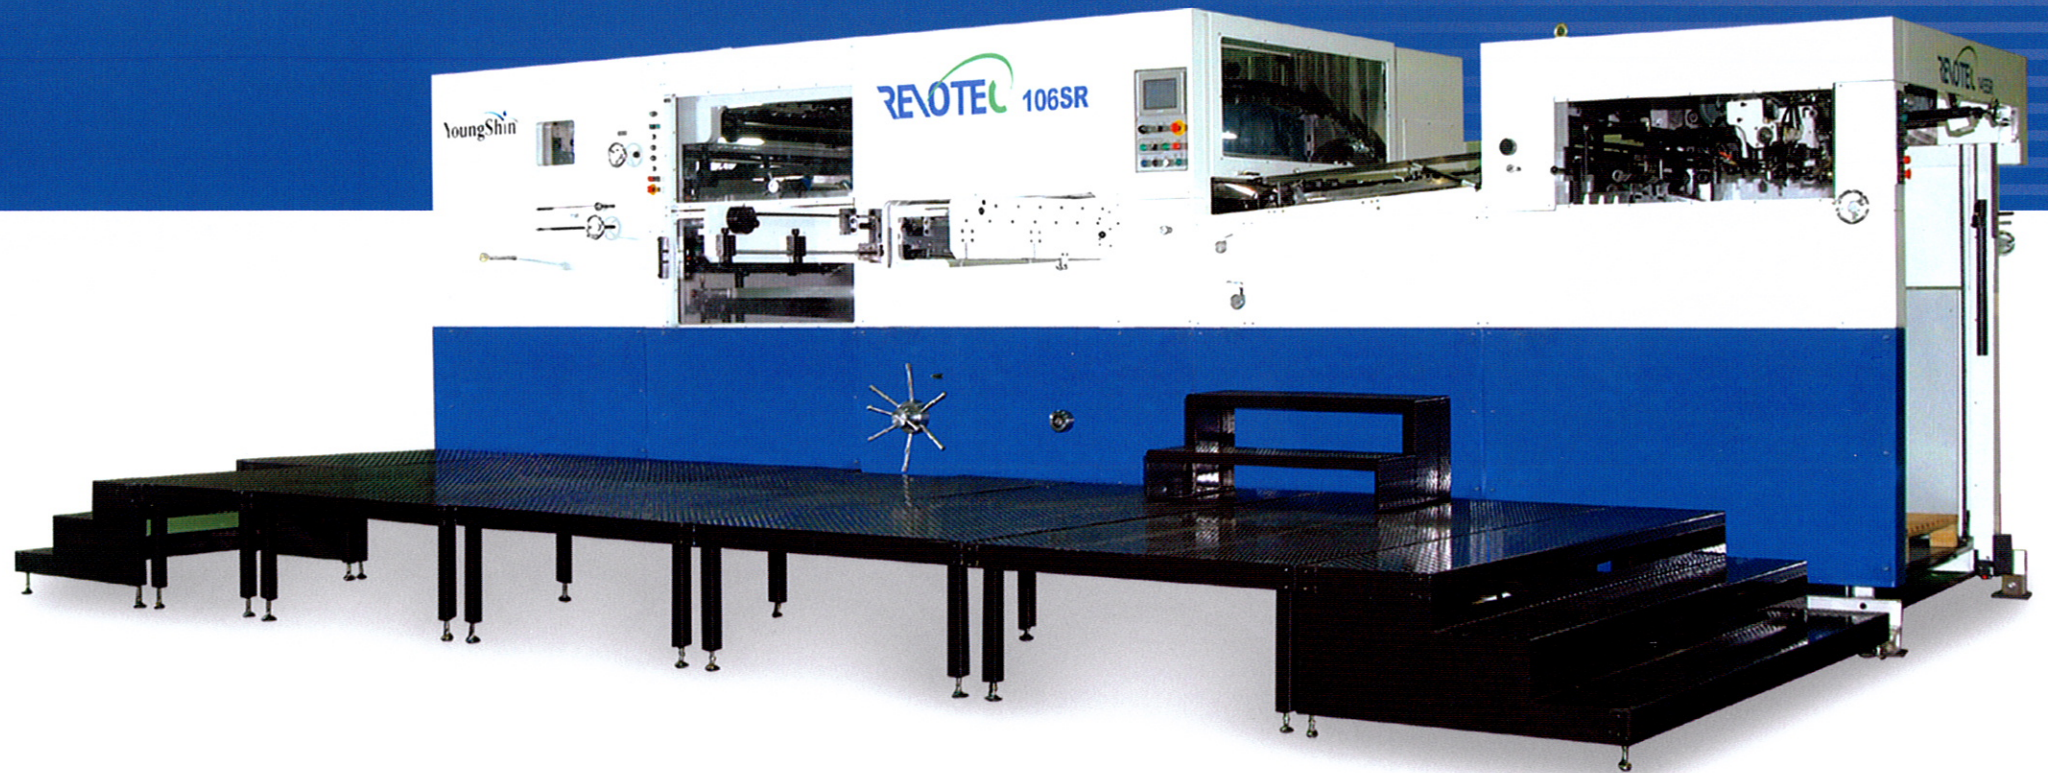

OPTION : Pre Make-Ready Table for Chase, Automatic Apron
Pre Make-Ready Table for Stripping

YoungShin

Specifications of REVOTEC 106SR

Maximum Sheet Size	1060 × 760 mm	41,73" × 29,92"
Minimum Sheet Size	400 × 340 mm	15,74" × 13,38"
Maximum Cutting Size	1060 × 745 mm	41,73" × 29,33"
Inside Chase	1140 × 784 mm	44,88" × 29,68"
Minimum Gripper Margin	8 mm	0,31"
Cutting Pressure	300 tons	330 US tons
Sheet Thickness	Carton Board 0,1 ~ 1,5 mm	Carton Board 0,004" ~ 0,06"
	Corrugated Board (E,B Flute) : 4 mm	Corrugated Board (E,B Flute) : 0,157"
Maximum Speed	7500 s/h	7500 s/h
Required Power Supply	22 Kw	22 Kw
Main Motor	11 Kw	11 Kw
Weight	19 tons	21 US tons
Option	AUTOMATIC APRON : NON-STOP DELIVERY	




**The leader
for the better success**



FEEDER
With Suction Device in mechanical driving, sheets smoothly fed.




FEEDING CONVEYOR
Makes the feeding of thin sheets and warped sheets possible.



SIDE LAY
Side Lay with sensor ensures excellent register by proximating the distance between side and front lay more.




GRIPPER
Enhanced durability for the Gripper Bar and Drive.




CHASE
Chase turn-over and center line ensure quick order change, Air Floating Device for Cutting Plate



TOUCH SCREEN
Clear and simple readings ensures quick fault finding and machine operation. Cutting pressure gauge ensures machine and cutting die durability by checking cutting pressure and over-cutting pressure.



STRIPPING SECTION
Waste stripping with Upper and Lower pins.



DELIVERY SECTION
Automatic counter and tabbing inserter ensure reliability and productivity, and batching.