

Shanklin[®] Models T-62/T-72H

Shrink Tunnel

Flexible, Dependable, and Ready to Take On Your Toughest Challenges



▲ T-72H SHOWN


- **Versatile**—The most versatile shrink tunnel on the market! Shrinks difficult packages; adjusts easily to handle a variety of applications.
- **Proven Reliable**—Includes long-lasting finstrip heater elements, precision temperature control units, and rugged 3/4 hp blower motors.
- **Easy to Use**—Simply set the variable speed conveyor and adjustable air velocity and temperature controls, and go!

Outstanding Shanklin High Speed Shrink Tunnels are an ideal match for our high speed automatic wrappers. Contact your Shanklin distributor to find out more.

Our Flagship Model for Maximum Speed

The Shanklin Model T-62/T-72H Shrink Tunnel is designed for maximum performance with high speed wrappers, solving a multitude of persistent wrapping challenges. These tough, efficient machines feature a high speed dual-chamber tunnel for optimum shrink capacity, each with independently controllable temperature, air velocity, and flow. Your choice of varying tunnel passage dimensions ensures that there's a model just right for your application!

T-62/T-72H Plan View

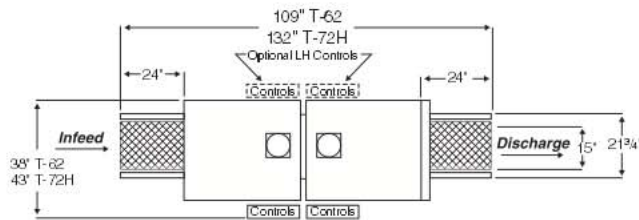

The Perfect Partner

The Shanklin T-62 or T-72H Shrink Tunnel performs seamlessly with our High-Speed Wrappers for a total quality shrink packaging solution.



Shanklin Model T-62/T-72H Specifications

	Model T-62	Model T-72H
Tunnel passage	10" high x 18" wide x 61" long	12" high x 22" wide x 84" long
Tunnel size	38" wide overall x 38" high above conveyor	43" wide overall x 41" high above conveyor
Conveyor height	29" minimum, 42" maximum	29" minimum, 42" maximum
Conveyor lengths	77", 93", 109" lengths stocked (109" is standard length)	100", 116", 132" lengths stocked (132" is standard length)
Conveyor speeds	Variable from 25 to 150 ft./min.	
Power*	230 volts, 3 phase, 64 amps, 14.8 KVA max.	
Blower motors	Two motors, 3/4 hp each motor	
Heaters	Multiple finstrip (encased element)	
Temperature controller	Precision indicating controller calibrated 50° to 500° F. Independent temperature control for each shrinking chamber.	
Controls	<ul style="list-style-type: none"> • Main power circuit breaker • Tunnel on/off switch • Conveyor start/stop switch • Conveyor variable speed control • Main and top air velocity controls 	
Safety features	<ul style="list-style-type: none"> • Motor overload protection • High temperature limit switches • Main power circuit breaker • Emergency stop switches 	
Available options	<ul style="list-style-type: none"> • Side air cascade plates with adjustable dampers • Volume control for bottom air • End viewing windows • Teflon conveyor belt • Live or dead roller conveyor • Composite link conveyor belt • Special package guides • "Poly kit" for use with LDPE • Casters 	

*Optional voltages, amperages and KVA specifications can be supplied upon request.
 U.S. Patent No. 3,312,811. Specifications on all machines subject to change without notice. Some photos may show accessories not part of the basic machine.

STAINLESS STEEL MODELS AVAILABLE

Distributed by:



Shrink Packaging
 100 Westford Road
 Ayer, MA 01432
 978-772-3200 Fax: 978-772-5660
 www.shanklincorp.com

Our Products Protect Your Products™

Corporate Office: Sealed Air Corporation
 200 Riverfront Boulevard, Elmwood Park, NJ 07407 USA www.sealedair.com
 © Reg. U.S. Pat. & TMOff. © Sealed Air Corporation (US) 2008. All rights reserved. Printed in the U.S.A. The "9 Dot Logo" and "Sealed Air" are registered trademarks of Sealed Air Corporation (US).