


AUTOMATIC FLATBED DIECUTTER

REXOTEC 145SR

Revolutionary
Diecutting Technology
For the Future

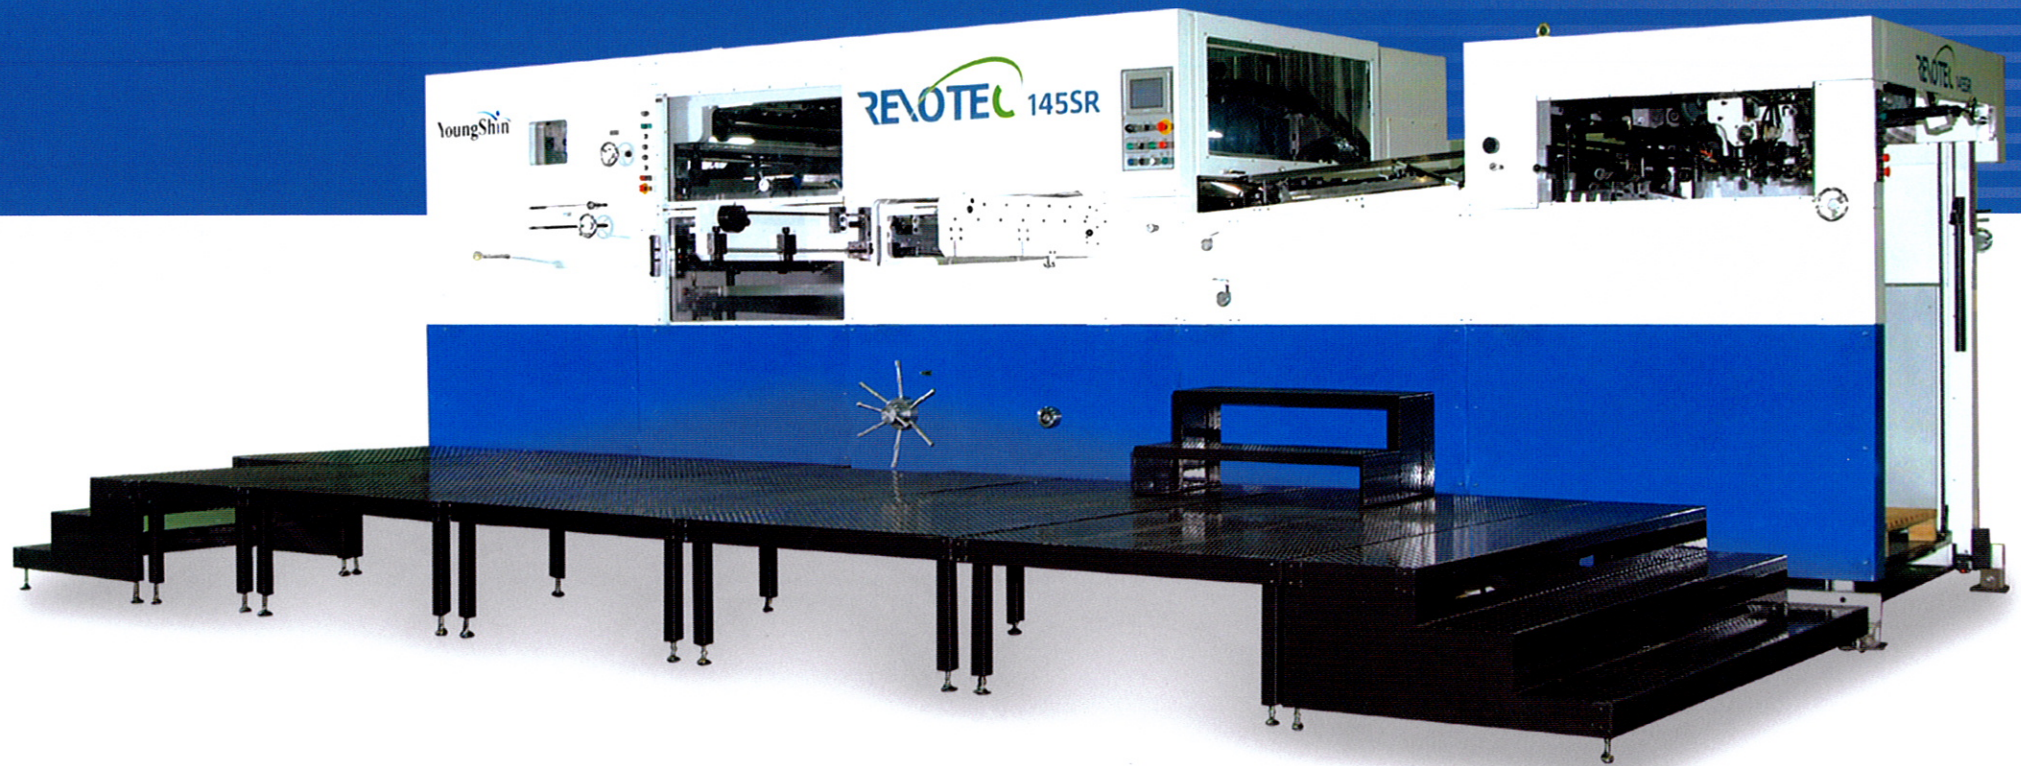


Specifications of REVOTEC 145SR




**The leader
for the better success**


Maximum Sheet Size	1450 × 1020 mm	57' × 40.15"
Minimum Sheet Size	700 × 500 mm	27.55' × 19.68"
Maximum Cutting Size	1450 × 1005 mm	57' × 39.56"
Inside Chase	1530 × 1174 mm	60.23' × 46.22"
Minimum Gripper Margin	8 mm	0.31"
Cutting Pressure	500 tons	551 US tons
Sheet Thickness	Carton Board : 0.1 ~ 1.5 mm Corrugated Board (E,B Flute) : 4 mm	Carton Board : 0.004" ~ 0.06" Corrugated Board (E,B Flute) : 0.157"
Maximum Speed	6000 s/h	6000 s/h
Required Power Supply	28 Kw	28 Kw
Main Motor	15 Kw	15 Kw
Weight	36 tons	40 US tons



FEEDER
With Suction Device in mechanical driving, sheets smoothly fed.




FEEDING CONVEYOR
Makes the feeding of thin sheets and warped sheets possible.



SIDE LAY
Side Lay with sensor ensures excellent register by proximating the distance between side and front lay more.




GRIPPER
Enhanced durability for the Gripper Bar and Drive.




CHASE
Chase turn-over and center line ensure quick order change.



TOUCH SCREEN
Clear and simple readings ensures quick fault finding and machine operation. Cutting pressure gauge ensures machine and cutting die durability by checking cutting pressure and over-cutting pressure.



STRIPPING SECTION
Waste stripping with Upper and Lower pins.



DELIVERY SECTION
Automatic counter and tabbing inserter ensure reliability and productivity, and batching.