

Apollo Compensating Stacker




Technical specifications



Mechanical speed	maximum 16,000 cycles per hour		
Size range	in mm (in ")		
	A maximum	450 (17 3/4)	single-sided ejection
		420 (16 1/2)	alternate delivery
	A minimum	140 (5 1/2)	
	B maximum	320 (12 5/8)	
	B minimum	100 (4)	
	C maximum	40 (1 9/16)	
	C minimum	1 (0.4)	(or 8 pages)
Layer compartment height	140 mm (5 1/2")		
Stack height	280 mm (11")		
Electrical power requirements	stacker incl. control system	0,75 kW	
Compressed air consumption	6 bar	17 Nm ³ /h (10 cfm at 87 psi)	
Weight	720 kg (1,580 lbs)		
Cycle time	Single-sided ejection	1.5 sec	
	Alternate delivery	1.2 sec	

Dimensions, design and equipment configuration subject to change.

- 1 Apollo Compensating Stacker model 1540
- 2 Infeed belt
- 3 Roller delivery table model 1540

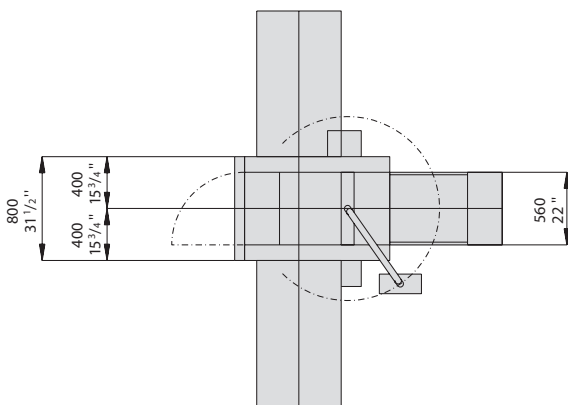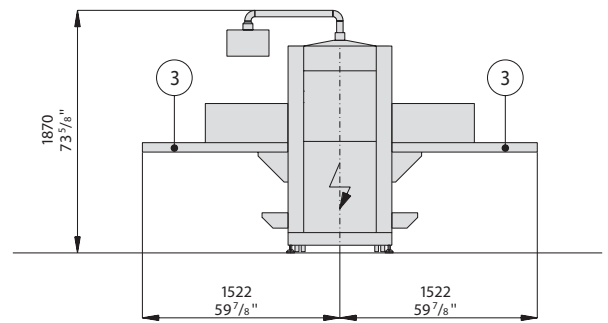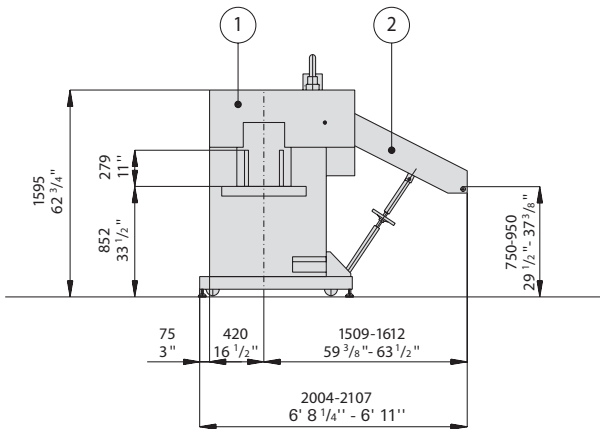

Sales and Service

Müller Martini Marketing AG
 Untere Brühlstrasse 13
 CH-4800 Zofingen, Switzerland
 Phone +41 (0)62 745 45 75
 Fax +41 (0)62 751 55 50
 info@mullermartini.com
 www.mullermartini.com