

Automatic High Speed Saddle Stitcher

Micro



Compact Stitcher “*Micro*” with customer ori



ORF-122 Duplex rotary feeder (two pockets/feeder)



ORC-315 Folder feeder



ORS-713 Saddle stitcher 5" control panel



OT-352 3-Knife Trimmer

Standard Features


- Signature scanner
- Wire monitor
- Mechanical caliper

Options

- Auto stitch positioning
- Sequential start & stop;
- Transmission changeover
- Misfeed control
- Non feed
- Center cut device
- Punching device
- CCD camera
- Dust collector

Specifications:

Auto feed:	Max	275×380	mm
	Min	95×100	mm
Trim size:	Max	257×364	mm
	Min	85×148	mm
Trim thickness:	Max	12	mm
Center cut size:	Max	257×364 / 2	mm
	Min	85×257 / 2	mm
Cutting Gap:		0-6	mm
Center cut thickness:	Max	6	mm
Mechanical speed	Max	9,000	CPH

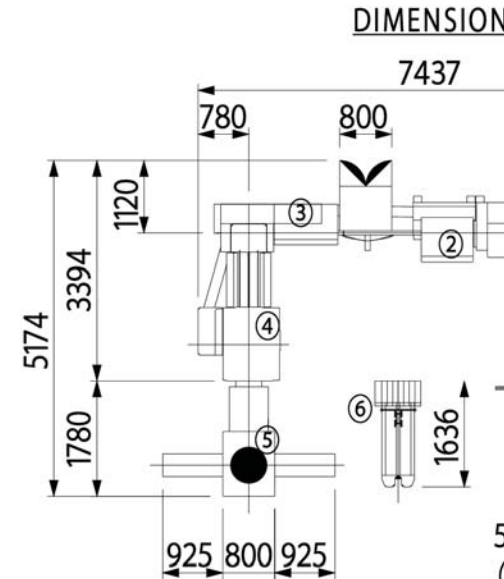

OSAKO & CO., LTD.

- Head Office: 1-20-26 Daito, Urawa-Ku, Saitama-Shi, Saitama, 330-0043 Japan
 - Osaka Office: 2-1-7 Doshin, Kita-Ku, Osaka-Shi, Osaka 530-0035
 - F a c t o r y: 208 Oh-Aza Natsumo, Takahata-Machi, Higashi Okitama, Yamagata 999-2172
- http://www.osako.co.jp E-mail: support@osako.co.jp

- Phone: 048-886-7
- Phone: 06-6351-9
- Phone: 0238-57-3

