


C. Technical Data

Basic Machine

Basic machine type WP 1100

Format range

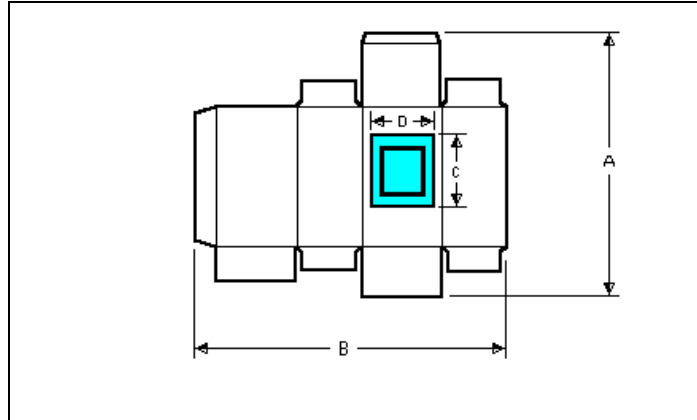

Blank Operation	Single Lane Operation	Double Lane Operation
Length A	100 mm - 1020 mm	100 mm - 1020 mm
Width B	80 mm - 1100 mm	80 mm - 510 mm
Length of window C	60 mm - 720 mm	60 mm - 380 mm
Width of window D	30 mm - 840 mm	30 mm - 840 mm

Carton weight

Carton 250 g/m² - 600 g/m²

Corrugated up to 4.5 mm thickness

Film thickness

PVC, PE, PS etc. 0.03 mm - 0.3 mm

O-PET, PP 0.03 mm - 0.2 mm

(Film thickness limits maximum cutting width)

Outer diameter max. 500 mm

Inner diameter 76 mm

Other dimensions on request!

Technical Data

Basic Machine

Nominal output
(Depending on blank length)


	Maximum blank length	Single lane operation	Double lane operation
1-up :	more than 560 mm	165 pcs/min	330 pcs/min
2-up :	less than 560 mm	330 pcs/min	660 pcs/min
3-up :	less than 350 mm	495 pcs/min	990 pcs/min

The technical data mentioned above are maximum indications. They are dependent upon type, quality of material and its substance.

Maximum and/or minimum indications cannot be accommodated if they coincide in the same blank. **When combined with additional equipment different data may apply.**

Power Supply: 230/400V, 63 A main fuse, 5 x 10mm²
(Standard) Compressed air (filtered and dried) at least 6 bar
Air supply diameter 12mm / 0.5 in

Power consumption at 80% 18 KW

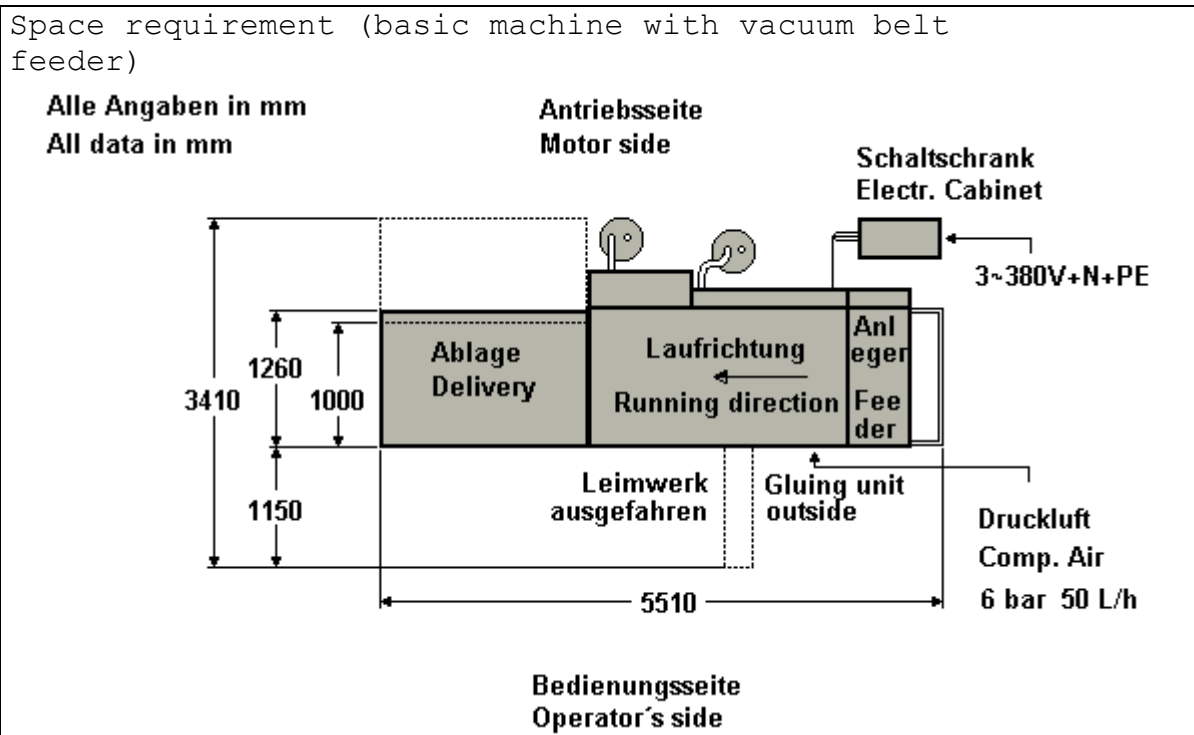

Weights WP 1100 matic + EF: approx. 5,900 kg (6,800 kg incl. seaworthy packing)