
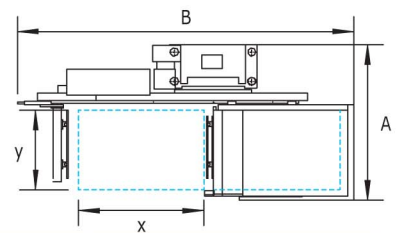


# Hi-TEC AUTOMATIC UNLOADER

PROGRAMME  
CONTROLLED  
GAUGE MOVEMENT

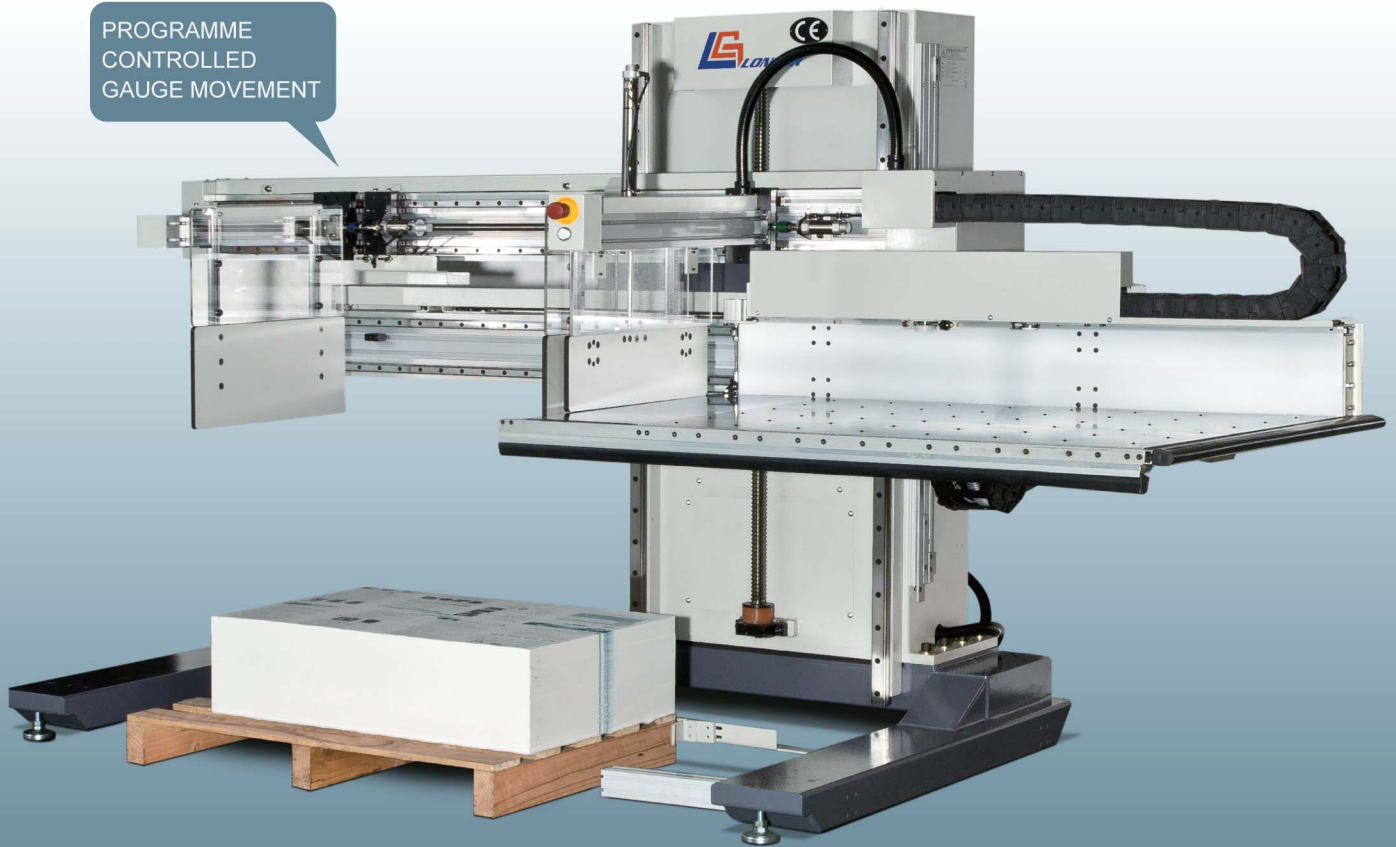

SPECIFICATIONS		U 120	U 145	U 165
Max. Sheet size (y)	mm/inch	800x1200/31.49x47.24	1050x1450/41.33x57.08	1220x1640/48.03x64.57
Min. Sheet size (x)	mm/inch	400x400/15.74x15.74	500x400/19.16x15.74	650x400/25.59x15.74
Max. Height of ream	mm/inch	160/6.29	160/6.29	160/6.29
Min. Height of ream	mm/inch	40/1.57	40/1.57	40/1.57
Max. Pile height	mm/inch	1250/49.21	1600/62.99	1600/62.99
Max. Carrying capacity of ream	kg/lbs	200/440	300/660	300/660
Machine weight	kg/lbs	1100/2420	1400/3080	1500/3300
Machine width (B)	mm/inch	3400/133.85	3650/143.70	3850/151.57
Machine depth (A)	mm/inch	1650/64.96	1900/74.80	2100/82.67
Machine height	mm/inch	2400/94.48	2800/110.23	2800/110.23
Electrical Supply		As required	As required	As required
Power	KW(HP)	1.5(2)	1.5(2)	1.5(2)
Compressed Air	l/min Bar	6~8	6~8	6~8

★ Technical data subject to change without notice