



FRANKFURT, GERMANY

## Since 1970, STOCK has been a leading producer of Sheet-to-Sheet Mounter and Labeling machines.

LLM/HP

>

>

Spot or Full Sheet Labeling

Up to 5,000 Pieces per Hour

STOCK's product line ranges from 49" to 80" machine widths. Material thicknesses - for the carrier substrate - can range from 0.6 to 7mm with top sheets from 150 to 400 gsm (70# - 28pt). Upgrade options are available to support thicker top, and bottom materials.

LM

- > Spot or Full Sheet Labeling
- > 600 1,000 Pieces per Hour





## 'A' & 'S' Models

STOCK Litho Laminators are modular in design, and thus can be automated from the start, or scaled in the future. The model name is simply a construction of which modules are required. For example, a common machine offering is A-134R5/1500.


"A" refers to accuracy, as apposed to"S" which refers to speed. The "A" model has a maximum speed of 3,000 sheets per hour and has a 1/64" tolerance, while the "S" model has a maximum speed of 8,000 sheets per hour and has a 1/32" tolerance.

The "134R5" refers to the modules that the unit consists of. In this case "1" is the laminator, "3" is the take-off table, "4R" refers to the substrate sheet feeder, and "5" refers to the pressure belt. *Available modules shown to the right.* 

Lastly, the "1500" is the working width in millimeters, 59.1" in this case. Other available options are: 1250 (49.2"), 1650 (65.0"), and 2050 (80.7")

	'A' Model	'S' Model
Run Lengths	100 - 10,000	500 - 100,000
Registration	1/64″	1/32″
Mounter Widths	49.2"   59.1"   65.0"   80.7"	
Max. Sheet Length	82.5″	
Setup Time	5 minutes	
Max. Speed	3,000 sph	8,000 sph



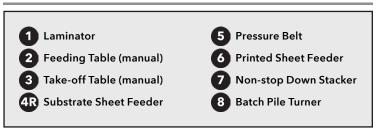



W222 N600 Cheaney Drive Waukesha, WI 53186

Telephone Fax +1 (262) 522-3280 Toll-free +1 (800) 236-7603

E-mail

## Hundreds of listings at BestGraphics.net

Product design and technical specifications subject to change without notice.

