



## SA

### SEMI-AUTOMATIC SHEET-TO-SHEET LAMINATING/MOUNTING MACHINE

#### LOW SPEED

Up to 1500 sheets/hour



#### EDGE TO EDGE

Consistant registration accuracy up to 0,2mm

#### LOW CAPACITY

Manual Top feeder - 800mm Bottom feeder



#### SEMI-AUTOMATIC FEEDER


Manual top and suction cup picker for bottom

## SA

The Lamina SA is a sheet-to-sheet semi-automatic laminating/mounting machine. It has an automatic suction cup feeder for bottom sheets and a hand fed operation for top sheets. The machine is very operator-friendly, and because of the modular construction it allows upgrading to fully automatic with little or no disruption.


A varying amount of top and bottom sheets can be handled in the machine, and because of its compact size the machine is very easy to integrate in your working area.

A number of options such as Single Face Feeder, Down Stacker, Pressure Belt etc. can be added whenever it is required.



← More info and video



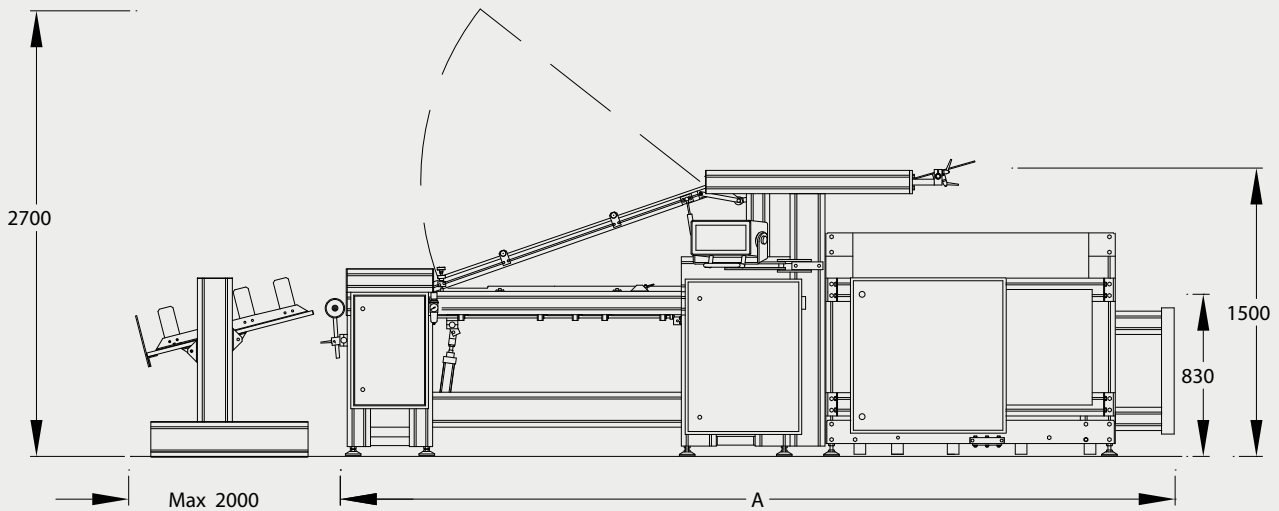

## SA SEMI-AUTOMATIC SHEET-TO-SHEET LAMINATING/MOUNTING MACHINE



Size Range Model	Maximum Sheet Size		Machine Size		Weight
	Width	Length	Width	Length A	
1110* SA	1100 mm (43")	1050 mm (41")	2050 mm (81")	4400 mm (173")	1600 kg (3520 lbs)
1116 SA	1100 mm (43")	1600 mm (63")	2050 mm (81")	4600 mm (181")	2100 kg (4630 lbs)
1416 SA	1400 mm (55")	1600 mm (63")	2350 mm (94")	4600 mm (181")	2300 kg (5070 lbs)
1420 SA	1400 mm (55")	2000 mm (79")	2350 mm (94")	5400 mm (212")	2400 kg (5290 lbs)
1620 SA	1600 mm (63")	2000 mm (79")	2550 mm (102")	5400 mm (212")	2700 kg (5950 lbs)

Minimum Sheet Width	200 mm (8")
Minimum Sheet Length	350 mm (13¾")
Feeder Capacity	Bottom feeder: 800 mm (32")
Top Sheet	130 to 450 g/m <sup>2</sup> 1 pts = 28,25 g/m <sup>2</sup>
Bottom Sheet	From 250 g/m <sup>2</sup> to 10 mm (0,39") 1 pts = 28,25 g/m <sup>2</sup> corrugated from 0,6 - 10 mm (0,016" - 0,39")
Registration Accuracy**	Up to 0,2mm (0,008")
Total Installed Power	5,0 kW
Electrics	208 V, 3 phase, 60 cycle; or 400 V, 3 phase, neutral, 50/60 cycle; or Specified
Air Requirements	6 bar; 80 psi; 34 CFM, Approximately 300 L/min

\* 1110 SA is not compatible for pallet jack loading

\*\* Depends on properties of materials being used and existing operating conditions.

### OPTIONS

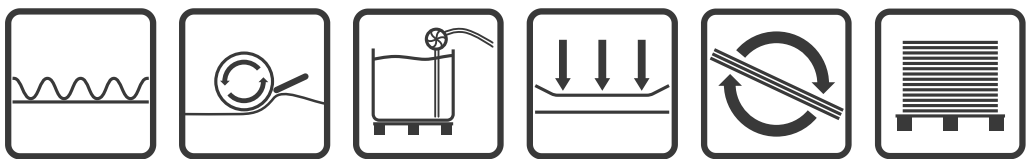

← More info and video

